

MATH 3341 — Fall 2020

Lab 05: Formatting Output and L^AT_EX

Download [Math.3341.Lab.05.zip](#), unzip it and replace the files under `H:\Math.3341\Math.3341.Lab.05`. Change the current working directory by typing `cd H:\Math.3341\Math.3341.Lab.05` in the Command Window, and type `edit lab_05_script` in the Command Window to edit `lab_05_script.m`.

1 FORMATTING NUMERICAL VALUES

- (a) Define a variable `x`, of which the value is e^π .
- (b) Define a cell array `formatOptions`, of which the entries are listed as follows:
 - (1) `rat`
 - (2) `longeng`
 - (3) `longg`
 - (4) `longe`
 - (5) `long`
 - (6) `shorteng`
 - (7) `shortg`
 - (8) `shorte`
 - (9) `short`
- (c) Use a for-loop to output `x` in the above formats (do NOT change the order).

2 FORMATTING DATA USING `fprintf`

- (a) Define `x` to be column vector ranging from 0 to 2π with 25 entries, and define `y1`, `y2`, `y3` as follows

$$y_1 = \sin(x/2), \quad y_2 = \sin(x), \quad y_3 = \sin(2x).$$

- (b) Concatenate column vectors `x`, `y1`, `y2`, `y3`, and store the new 2-D array to `data`.
- (c) Print out the heading in the Command Window using `fprintf`, where the heading of the output is `x`, `sin(x/2)`, `sin(x)`, `sin(2x)`, whose widths are 9. The heading should be left-justified.
- (d) Then use a for-loop to loop over each row of `data`: use `fprintf` to print out the numerical values, which have width 9 with 6 decimal places, in the Command Window. All numerical values should be left-justified.

3 FORMATTING DATA FOR L^AT_EX

This part we will format `data` (defined above) for L^AT_EX.

- (a) Set the output filename to `sin.tex`, and the permission to `w` (write mode) in `fopen` and store the file handle to the variable `fileHandle`.
- (b) Use `fprintf` to print out the setup for `table` and `tabular` environments. The output should be as follows

```

1 \begin{table}[!hbtpr]
2 \centering
3 \caption{Sine functions}
4 \label{tab:sin}
5 \begin{tabular}{lcr}
6 \toprule
7 \midrule
8 \bottomrule
9 \end{tabular}
10 \end{table}

```

- (c) Print out the heading of the data, whose column width is 11 between `\toprule` and `\midrule`. The expected output is as follows:

```

1      $$$ & $\sin(x/2)$ & $\sin(x)$ & $\sin(2x)$ \\\

```

- (d) Print out the numerical values of each row in `data` between `\midrule` and `\bottomrule` using a for-loop. Each number has width 9 and 6 decimal places. Also each number should be enclosed by a pair of `$` and separated by `&`. The expected output for one of the rows should be as follows

```

1 $ 0.000000$ & $ 0.000000$ & $ 0.000000$ & $ 0.000000$ \\\

```

- (e) Print the content of `sin.tex` by calling `type('sin.tex')`.

4 PLOTTING MULTIPLE FUNCTIONS USING FOR-LOOP

- (a) Define a cell array `styles`. The elements are plotting styles, i.e.,
- (1) solid line with circle as the marker;
 - (2) dashdot line with diamond as the marker;
 - (3) dashed line with triangle (up) as the marker.
- (b) Define another cell array `y`, of which the entries are `y1`, `y2`, and `y3`.
- (c) Then use a for-loop to plot each entries of `y` versus `x` with in the same figure window the above styles (in the same order).
- (d) Set legend, labels, grid, and title. Change the range of `x`-axis to $[0, 2\pi]$, and that of `y`-axis to $[-1, 1]$. Set the following properties as you did in last lab. The expected result is shown in Figure 1.

- `XTick` to $[0, \pi / 2, \pi, 3 * \pi / 2, 2 * \pi]$;

- `XTickLabel` to `{'0', '$\pi/2$', 'π', '$3 \pi/2$', '2π'}`;
- `GridLineStyle` to `'--'`;
- `Box` to `'on'`;
- `BoxStyle` to `'full'`.

(e) Then save the plot using the following lines of commands:

```
1 name = 'lab_05_plot';
2 fig = figure(1);           % Set figure i as current figure window
3 set(fig, 'PaperPositionMode', 'auto'); % Set paper position mode to 'auto'
4 pos = get(fig, 'PaperPosition'); % Get figure window paper position
5 set(fig, 'PaperSize', [pos(3) pos(4)]); % Set figure paper size
6 print(fig, '-dpdf', name); % Save figure
```

Type `diary('lab_05_output.txt')` in the Command Window, run the script file `lab_05_script.m`, and type `diary off` in the Command Window. Upload `lab_05_output.txt`, `sin.tex`, and `lab_05_script.m` to the folder `src` on Overleaf.

On Overleaf, open `body.tex` under the folder `LaTeX`. In the last section of the report, you will reproduce Section 5 using L^AT_EX. You may find the following helpful:

- You may use environments such as `align`, `figure`, and `table`.
- You may use `\includegraphics[width=amount unit]{/path/to/figure.pdf}` to specify the width of a figure. In our case, the width of the figure is `0.75\textwidth`.
- For special characters, you may look them up in [L^AT_EX.Mathematics.Symbols.pdf](#).
- You may use `\input{/path/to/sin.tex}` to include the table you got from MATLAB.

Recompile and submit the PDF file generated by Overleaf to WyoCourses.

5 BASICS OF L^AT_EX

5.1 SINE FUNCTIONS

For given $x \in [0, 2\pi]$ with step size $\pi/12$, we can obtain the evaluations of (5.1), (5.2), (5.3) at x (see Table 1), and the corresponding plot (see Figure 1).

$$y_1 = \sin(x/2) \tag{5.1}$$

$$y_2 = \sin(x) \tag{5.2}$$

$$y_3 = \sin(2x) \tag{5.3}$$

Table 1: Sine functions

x	$\sin(x/2)$	$\sin(x)$	$\sin(2x)$
0.000000	0.000000	0.000000	0.000000
0.261799	0.130526	0.258819	0.500000
0.523599	0.258819	0.500000	0.866025
0.785398	0.382683	0.707107	1.000000
1.047198	0.500000	0.866025	0.866025
1.308997	0.608761	0.965926	0.500000
1.570796	0.707107	1.000000	0.000000
1.832596	0.793353	0.965926	-0.500000
2.094395	0.866025	0.866025	-0.866025
2.356194	0.923880	0.707107	-1.000000
2.617994	0.965926	0.500000	-0.866025
2.879793	0.991445	0.258819	-0.500000
3.141593	1.000000	0.000000	-0.000000
3.403392	0.991445	-0.258819	0.500000
3.665191	0.965926	-0.500000	0.866025
3.926991	0.923880	-0.707107	1.000000
4.188790	0.866025	-0.866025	0.866025
4.450590	0.793353	-0.965926	0.500000
4.712389	0.707107	-1.000000	0.000000
4.974188	0.608761	-0.965926	-0.500000
5.235988	0.500000	-0.866025	-0.866025
5.497787	0.382683	-0.707107	-1.000000
5.759587	0.258819	-0.500000	-0.866025
6.021386	0.130526	-0.258819	-0.500000
6.283185	0.000000	-0.000000	-0.000000

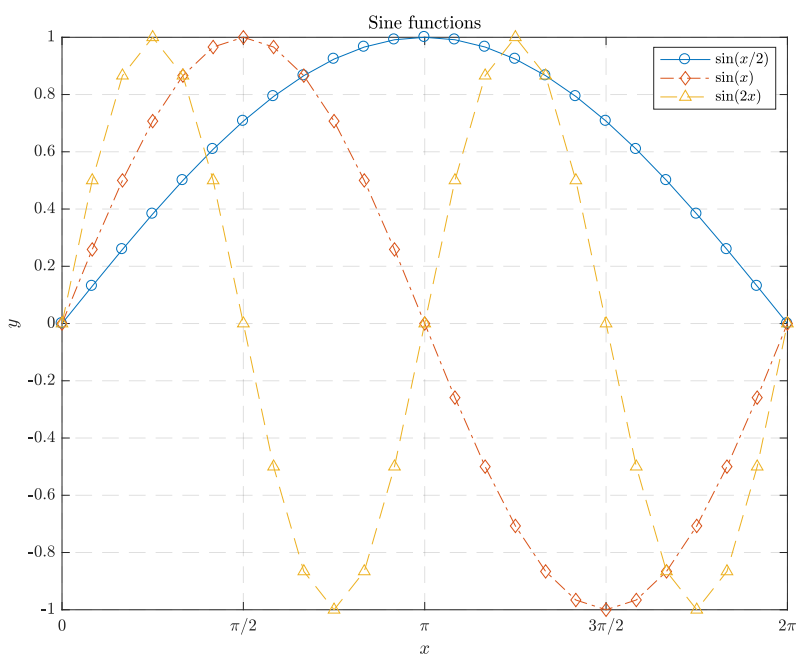


Figure 1: Sine functions